

THERMICROLL*self-repairing*
H.S.D.

Rapid flexible roll-up door, totally self-repairing after an impact. Ideal solution for fast and continuous passages, because it's designed for intensive use.




PARAMETERS	TECHNICAL AND OPERATING SPECIFICATIONS	
APPLICATION	Inside and outside	
MAX CLEAR DIMENSIONS	8000 x 8000 mm (standard)	
OPENING SPEED	~ 2 m/s	
CLOSING SPEED	~ 0,8 m/s	
OPERATING TEMPERATURE	-20°C +30°C	
WIND RESISTANCE	Class	
W 3000 x 3000	4	
W 5000 x 5000	3	
W 7000 x 5000	2	
W 8000 x 8000	1	
STRUCTURE	STANDARD Galvanized steel pre-powdered in standard colors	OPTIONAL Inox steel structure
CURTAIN	PVC curtain thickness 1,3 mm - 1300 gr/mq	
CONTROL PANEL	Inverter	
POWER SUPPLY	230 V 10 A - 400 V 8 A	
FREQUENCY	50/60 Hz	
LIMIT SWITCH	Encoder	
EMERGENCY OPENING	STANDARD Manual crank release	OPTIONAL UPS or counterweight
SAFETY EDGE (EN 13241)	Anti-crushing sensor	
DURABILITY	1.000.000 open/close cycles with standard maintenance every 6 months	



Thermicroll

self-repairing
H.S.D.

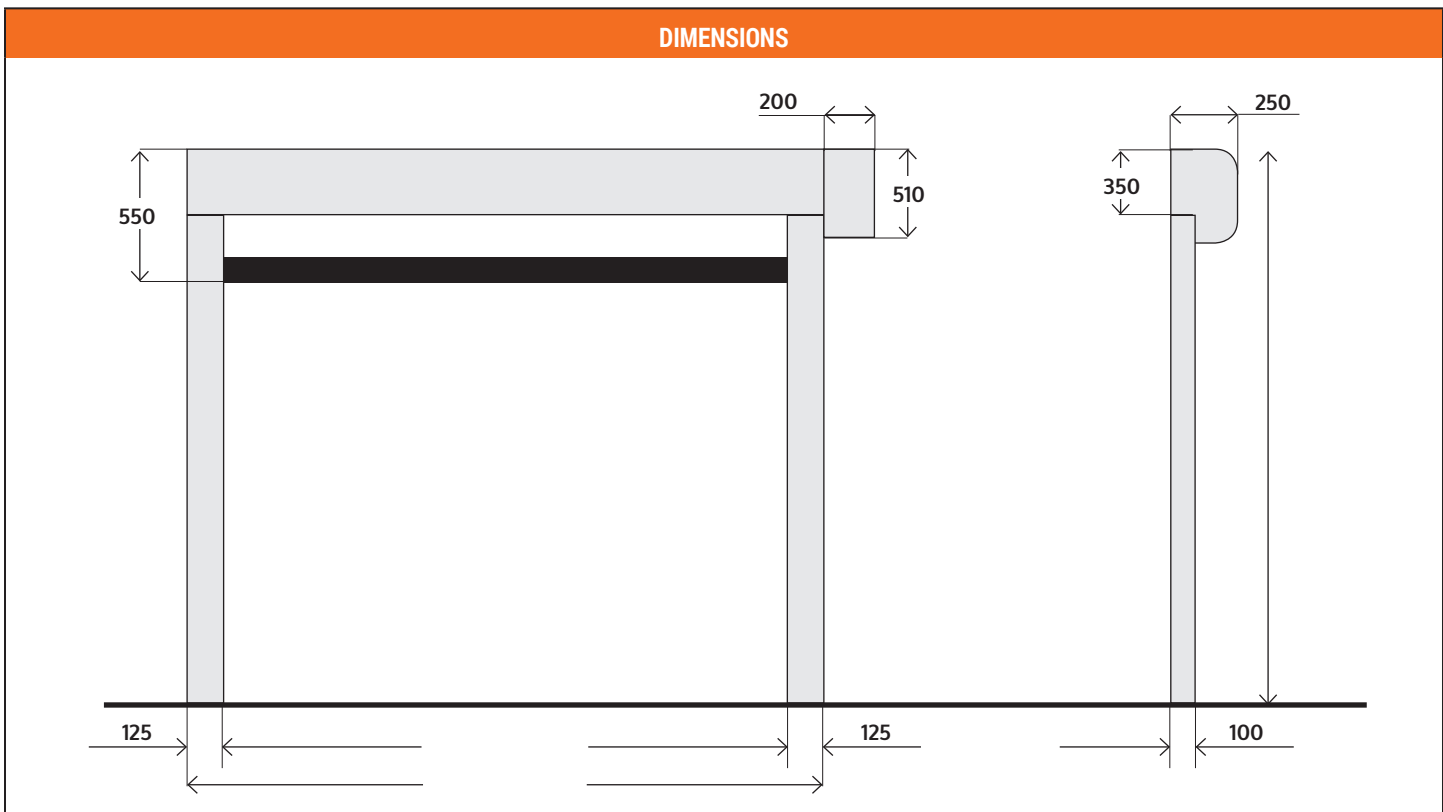

STRUCTURE STANDARD COLOR RANGE

RAL 9010 SIMIL	RAL 3000 SIMIL	RAL 5010 SIMIL
RAL 7073 SIMIL	RAL 9005 SIMIL	ZINCATO

CURTAIN COLOR RANGE

RAL 9010 SIMIL	RAL 1013 SIMIL	RAL 1003 SIMIL	RAL 2004 SIMIL
RAL 3002 SIMIL	RAL 6026 SIMIL	RAL 5012 SIMIL	RAL 5002 SIMIL
RAL 7037 SIMIL	RAL 7042 SIMIL	RAL 7035 SIMIL	RAL 9006 SIMIL

APPLICATION FIELDS

GDO	INDUSTRY	LOGISTIC	REFRIGERATION	GARAGE	AIRPORTS	PORTS	GENERAL USE
😊	😊	😊		😊	😊	😊	😊